

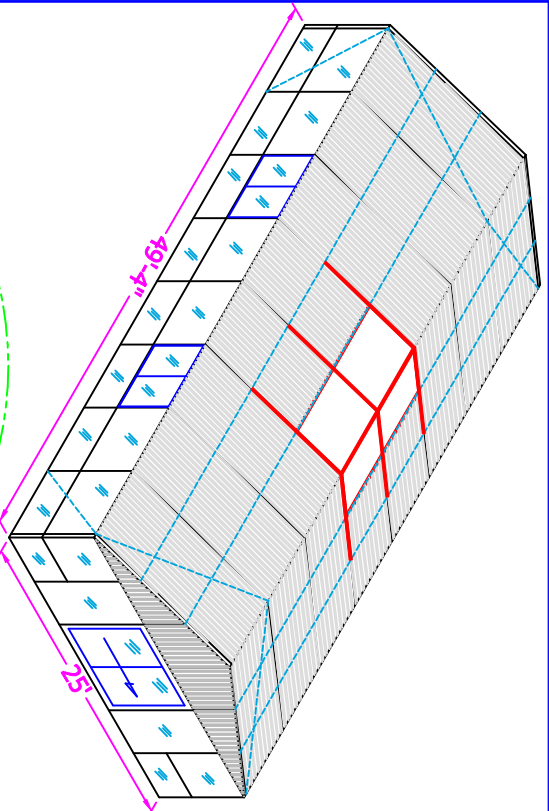



25' X 50' FREESTANDING WITH 6.083' BAY SPACING

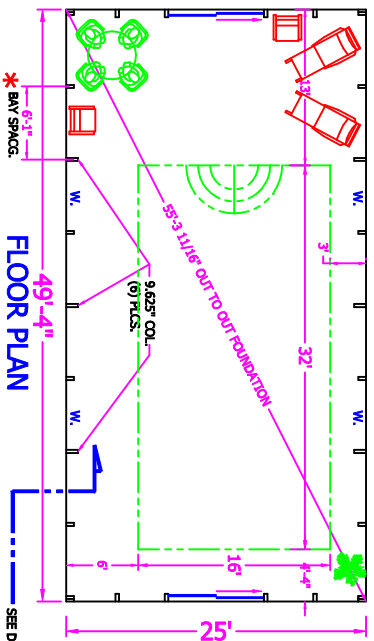


SECTION VIEW COLUMN & GRADE BEAM

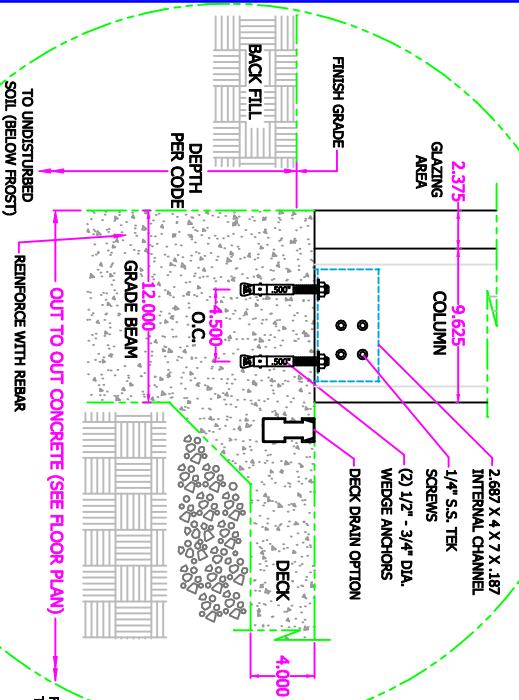

FLOOR PLAN

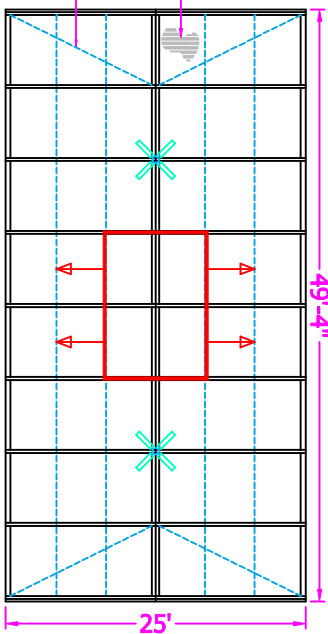


ROOF PLAN

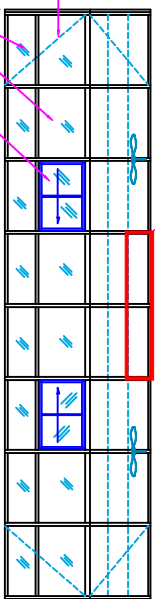

TYPICAL SIDEWALL ELEV.


(1) 115 V/3.44\" RETRACT MOTOR

(4) 8040 SLIDING WINDOWS WITH CLEAR INSULATED TEMPERED GLASS AND SCREEN

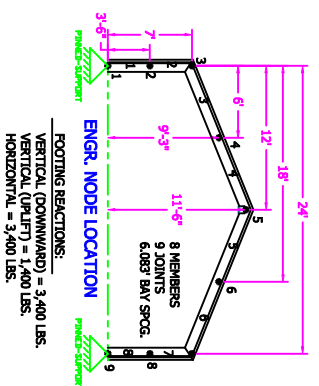


ENGR. NODE LOCATION

FOOTING REACTIONS:
VERTICAL (DOWNWARD) = 3,400 LBS.
VERTICAL (UPLIFT) = 1,400 LBS.
HORIZONTAL = 3,400 LBS.

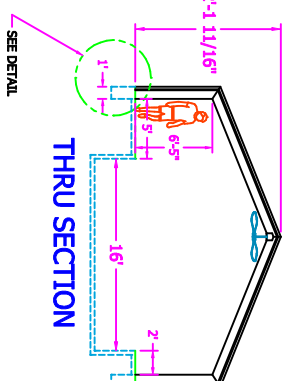

THRU SECTION

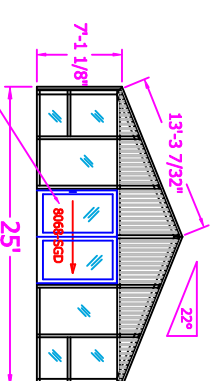

TYPICAL GABLE ELEV.

(2) 8068 SLIDING GLASS DOORS WITH CLEAR INSULATED TEMPERED GLASS AND SCREEN DOOR

STD. FRAME COLOR: BRONZE DURACRON (BAKED ENAMEL)

DESIGN LOADS:

LIVE - 40 PSF
DEAD - 5 PSF
WIND - 90 MPH



©COPYRIGHT 2002 POOL ENCLOSURES, INC. THIS DRAWING IS THE PROPERTY OF POOL ENCLOSURES, INC. AND SHOULD BE KEPT CONFIDENTIAL. ANY REPRODUCTION OR TRANSMISSION OF THIS DRAWING WITHOUT THE WRITTEN AUTHORIZATION OF POOL ENCLOSURES, INC. IS PROHIBITED. BY ACCEPTING THIS DRAWING, THE RECIPIENT AGREES NOT TO MAKE ANY CHANGES TO THE DRAWING, OR ANY PART THEREOF, WITHOUT THE WRITTEN AUTHORIZATION OF POOL ENCLOSURES, INC.

DRAWN BY: KATLER	RESUBMITTED: POOL ENCLOSURE
SCALE: 3/32" = 1'	JOB NAME: * 73" O.C. BAY EXAMPLE
DATE: 11/15/02	DRAWING NO: 25ECAD50
SHEET 1	